

Odränerad analys V-H

Report generated using GeoStudio 2007, version 7.16. Copyright © 1991-2010 GEO-SLOPE International Ltd.

File Information

Created By: [Petter Karlsson](#)
Revision Number: 35
Last Edited By: [Rebecca Bertilsson](#)
Date: 2011-06-01
Time: 09:30:05
File Name: V19140_odränerad print.gsz
Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V19140\110819\
Last Solved Date: 2011-06-01
Last Solved Time: 09:30:44

Project Settings

Length(L) Units: [meters](#)
Time(t) Units: [Seconds](#)
Force(F) Units: [kN](#)
Pressure(p) Units: [kPa](#)
Strength Units: [kPa](#)
Unit Weight of Water: [9.807 kN/m³](#)
View: [2D](#)

Analysis Settings

Odränerad analys V-H

Kind: [SLOPE/W](#)
Method: [Morgenstern-Price](#)
Settings
 Apply Phreatic Correction: [No](#)
 Side Function
 Interslice force function option: [Half-Sine](#)
 PWP Conditions Source: [Piezometric Line](#)
 Use Staged Rapid Drawdown: [No](#)
Slip Surface
 Direction of movement: [Left to Right](#)
 Use Passive Mode: [No](#)
 Slip Surface Option: [Entry and Exit](#)
 Critical slip surfaces saved: 5
 Optimize Critical Slip Surface Location: [Yes](#)
Tension Crack
 Tension Crack Option: [Tension Crack Line](#)
 Percentage Wet: [0.5](#)
 Tension Crack Fluid Unit Weight: [9.807 kN/m³](#)
FOS Distribution

FOS Calculation Option: **Constant**

Advanced

Number of Slices: **30**

Optimization Tolerance: **0.01**

Minimum Slip Surface Depth: **0.1 m**

Optimization Maximum Iterations: **2000**

Optimization Convergence Tolerance: **1e-007**

Starting Optimization Points: **8**

Ending Optimization Points: **16**

Complete Passes per Insertion: **1**

Driving Side Maximum Convex Angle: **5 °**

Resisting Side Maximum Convex Angle: **1 °**

Materials

CI 1

Model: **S=f(datum)**

Unit Weight: **16.6 kN/m³**

C-Datum: **28 kPa**

C-Rate of Change: **0 kPa/m**

Limiting C: **0 kPa**

Elevation: **25 m**

Pore Water Pressure

Piezometric Line: **1**

CI 2

Model: **S=f(datum)**

Unit Weight: **16.6 kN/m³**

C-Datum: **28 kPa**

C-Rate of Change: **1.81 kPa/m**

Limiting C: **0 kPa**

Elevation: **15 m**

Pore Water Pressure

Piezometric Line: **1**

CI 3

Model: **S=f(datum)**

Unit Weight: **17 kN/m³**

C-Datum: **28 kPa**

C-Rate of Change: **1.81 kPa/m**

Limiting C: **0 kPa**

Elevation: **15 m**

Pore Water Pressure

Piezometric Line: **1**

CI 4

Model: **S=f(datum)**

Unit Weight: **16.6 kN/m³**

C-Datum: **28 kPa**

C-Rate of Change: **0 kPa/m**


Limiting C: 0 kPa
Elevation: 15 m
Pore Water Pressure
Piezometric Line: 1

Crust


Model: Mohr-Coulomb
Unit Weight: 18 kN/m³
Cohesion: 30 kPa
Phi: 0 °
Phi-B: 0 °
Pore Water Pressure
Piezometric Line: 1

CI 5

Model: $S=f(\text{datum})$
Unit Weight: 17 kN/m³
C-Datum: 28 kPa
C-Rate of Change: 2.1 kPa/m
Limiting C: 0 kPa
Elevation: 5 m
Pore Water Pressure
Piezometric Line: 1

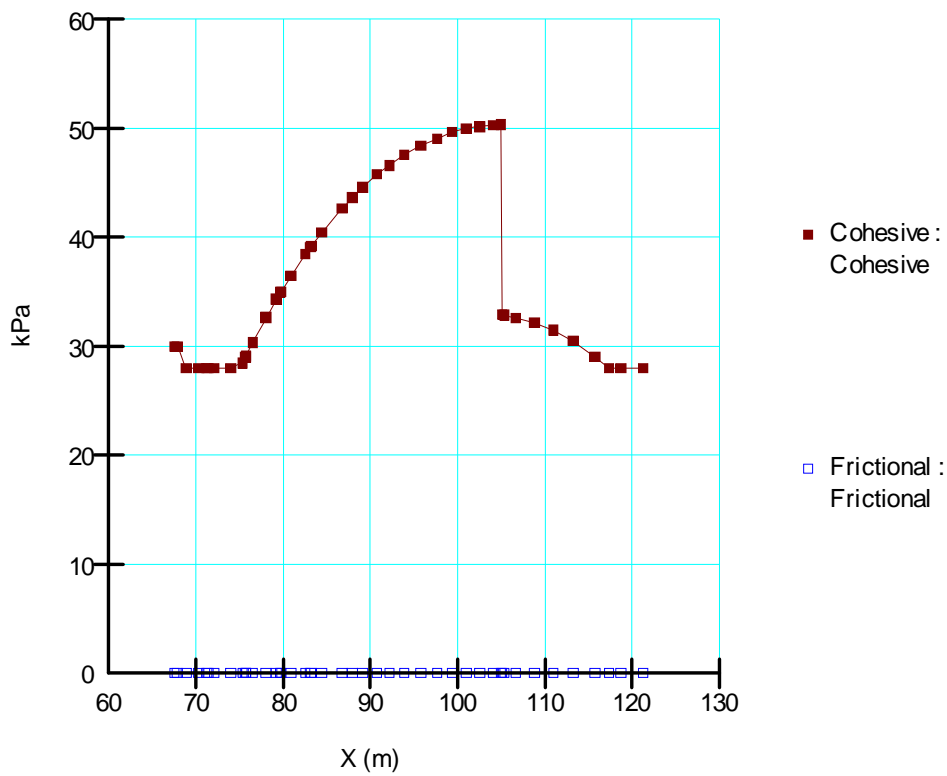

Figur 1. Kohesion och friktion.

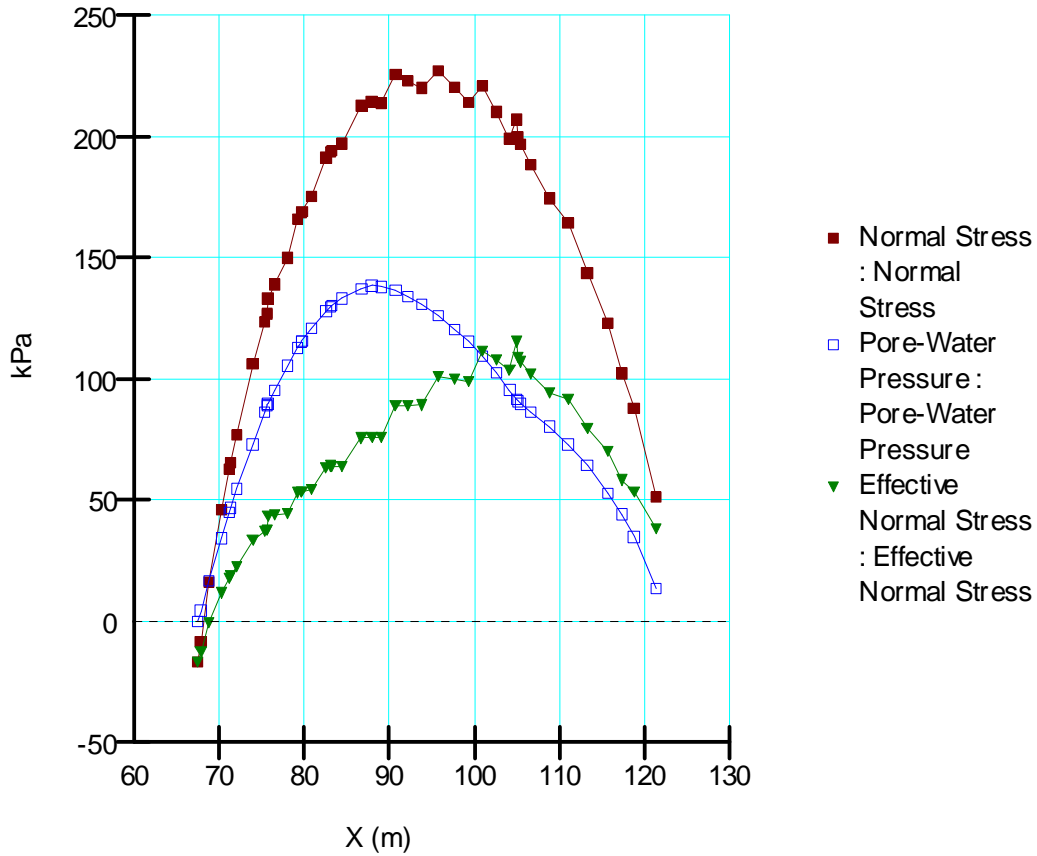

Figur 2. Totalspänning, effektivspänning och portryck.

Odränerad analys H-V

Report generated using GeoStudio 2007, version 7.16. Copyright © 1991-2010 GEO-SLOPE International Ltd.

File Information

Created By: [Petter Karlsson](#)
Revision Number: [31](#)
Last Edited By: [Rebecca Bertilsson](#)
Date: [2011-06-01](#)
Time: [08:55:46](#)
File Name: [V19140_odränerad print.gsz](#)
Directory: [P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V19140\110819\](#)
Last Solved Date: [2011-06-01](#)
Last Solved Time: [08:56:24](#)

Project Settings

Length(L) Units: [meters](#)
Time(t) Units: [Seconds](#)
Force(F) Units: [kN](#)
Pressure(p) Units: [kPa](#)
Strength Units: [kPa](#)
Unit Weight of Water: [9.807 kN/m³](#)
View: [2D](#)

Analysis Settings

Odränerad analys H-V

Kind: [SLOPE/W](#)
Method: [Morgenstern-Price](#)
Settings
Apply Phreatic Correction: [No](#)
Side Function
Interslice force function option: [Half-Sine](#)
PWP Conditions Source: [Piezometric Line](#)
Use Staged Rapid Drawdown: [No](#)
Slip Surface
Direction of movement: [Right to Left](#)
Use Passive Mode: [No](#)
Slip Surface Option: [Entry and Exit](#)
Critical slip surfaces saved: [5](#)
Optimize Critical Slip Surface Location: [Yes](#)
Tension Crack
Tension Crack Option: [Tension Crack Line](#)
Percentage Wet: [0.5](#)
Tension Crack Fluid Unit Weight: [9.807 kN/m³](#)
FOS Distribution

FOS Calculation Option: **Constant**

Advanced

Number of Slices: **30**

Optimization Tolerance: **0.01**

Minimum Slip Surface Depth: **0.1 m**

Optimization Maximum Iterations: **2000**

Optimization Convergence Tolerance: **1e-007**

Starting Optimization Points: **8**

Ending Optimization Points: **16**

Complete Passes per Insertion: **1**

Driving Side Maximum Convex Angle: **5 °**

Resisting Side Maximum Convex Angle: **1 °**

Materials

CI 1

Model: **S=f(datum)**

Unit Weight: **16.6 kN/m³**

C-Datum: **28 kPa**

C-Rate of Change: **0 kPa/m**

Limiting C: **0 kPa**

Elevation: **25 m**

Pore Water Pressure

Piezometric Line: **1**

CI 2

Model: **S=f(datum)**

Unit Weight: **16.6 kN/m³**

C-Datum: **28 kPa**

C-Rate of Change: **1.81 kPa/m**

Limiting C: **0 kPa**

Elevation: **15 m**

Pore Water Pressure

Piezometric Line: **1**

CI 3

Model: **S=f(datum)**

Unit Weight: **17 kN/m³**

C-Datum: **28 kPa**

C-Rate of Change: **1.81 kPa/m**

Limiting C: **0 kPa**

Elevation: **15 m**

Pore Water Pressure

Piezometric Line: **1**

CI 4

Model: **S=f(datum)**

Unit Weight: **16.6 kN/m³**

C-Datum: **28 kPa**

C-Rate of Change: **0 kPa/m**


Limiting C: 0 kPa
Elevation: 15 m
Pore Water Pressure
Piezometric Line: 1

Crust


Model: Mohr-Coulomb
Unit Weight: 18 kN/m³
Cohesion: 30 kPa
Phi: 0 °
Phi-B: 0 °
Pore Water Pressure
Piezometric Line: 1

CI 5

Model: $S=f(\text{datum})$
Unit Weight: 17 kN/m³
C-Datum: 28 kPa
C-Rate of Change: 2.1 kPa/m
Limiting C: 0 kPa
Elevation: 5 m
Pore Water Pressure
Piezometric Line: 1

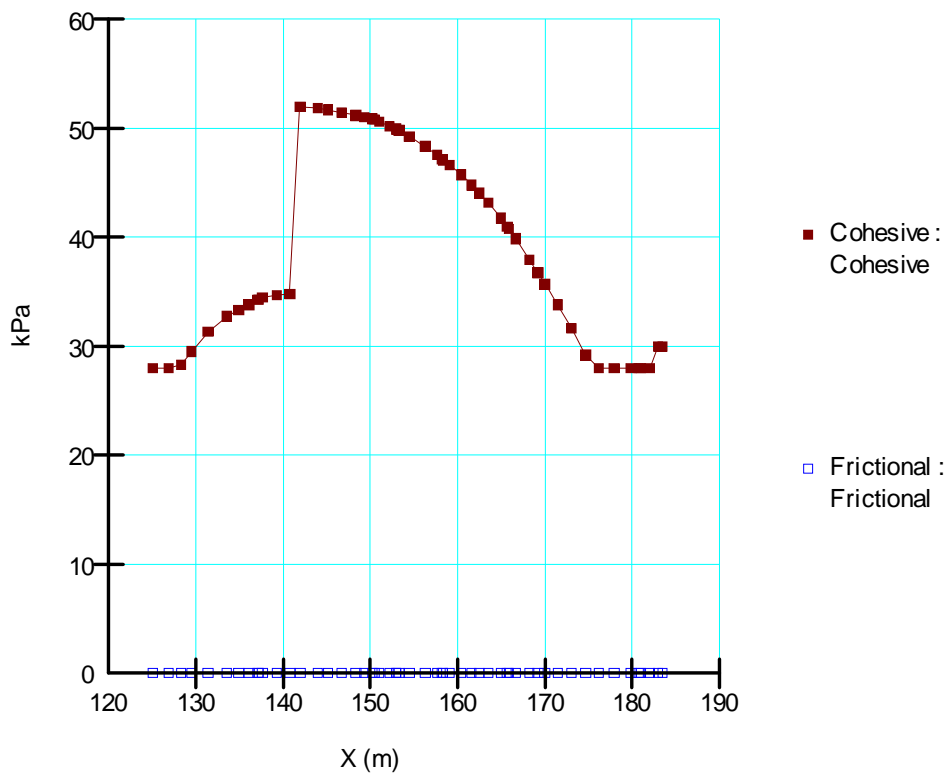

Figur 1. Kohesion och friktion.

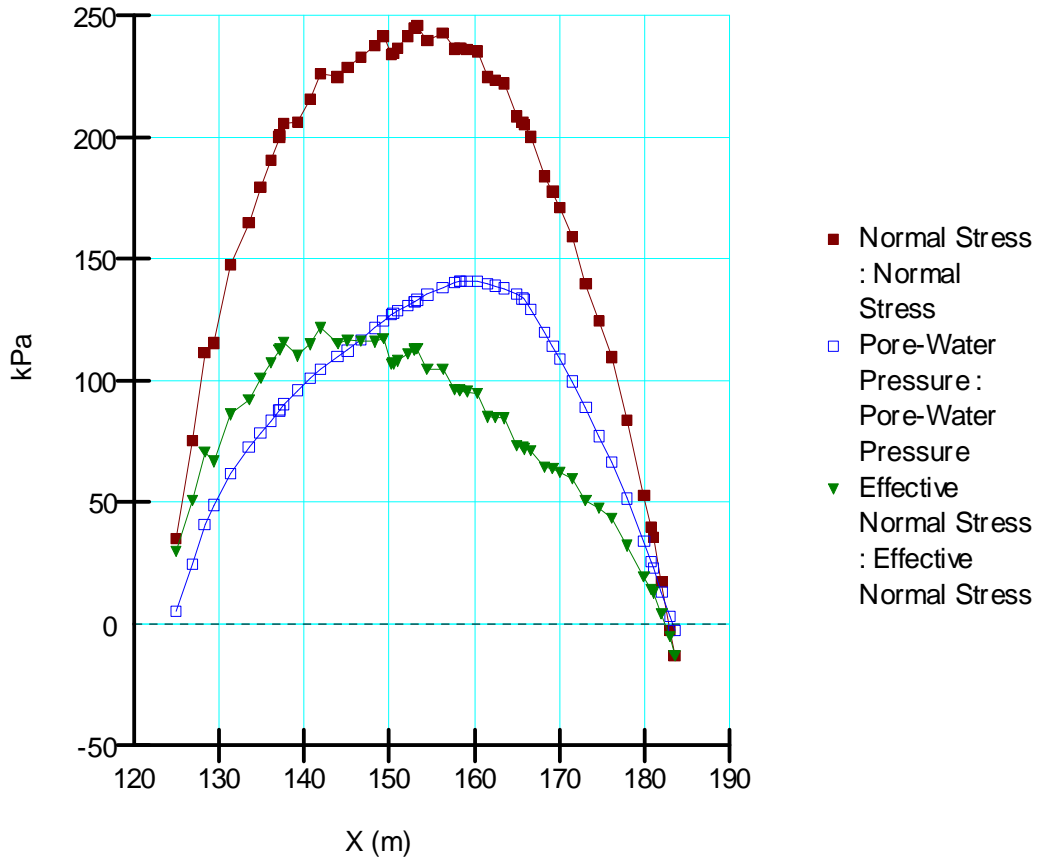

Figur 2. Totalspänning, effektivspänning och portryck.



KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALEN

Sektion: V19140
Delområde: Intagan - Ström
Analysmetod: Odränerad analys

Slip Surface Option: Entry and Exit
Method: Morgenstern-Price
PWP Conditions Source: Piezometric Line
Date: 2011-06-01
Created By: Petter Karlsson
Last Edited By: Rebecca Bertilsson

Skala 1:1000 (A3)


Name: Crust
Model: Mohr-Coulomb
Unit Weight: 18 kN/m³
Cohesion: 30 kPa
Phi: 0°

Name: CI 1
Model: S=f(datum)
Unit Weight: 16.6 kN/m³
C-Datum: 28 kPa
C-Rate of Change: 0 kPa/m
Elevation: 25 m

Name: CI 1
Model: S=f(datum)
Unit Weight: 16.6 kN/m³
C-Datum: 28 kPa
C-Rate of Change: 0 kPa/m
Elevation: 25 m

Name: CI 4
Model: S=f(datum)
Unit Weight: 16.6 kN/m³
C-Datum: 28 kPa
C-Rate of Change: 0 kPa/m
Elevation: 15 m

Name: CI 5
Model: S=f(datum)
Unit Weight: 17 kN/m³
C-Datum: 28 kPa
C-Rate of Change: 2.1 kPa/m
Elevation: 5 m

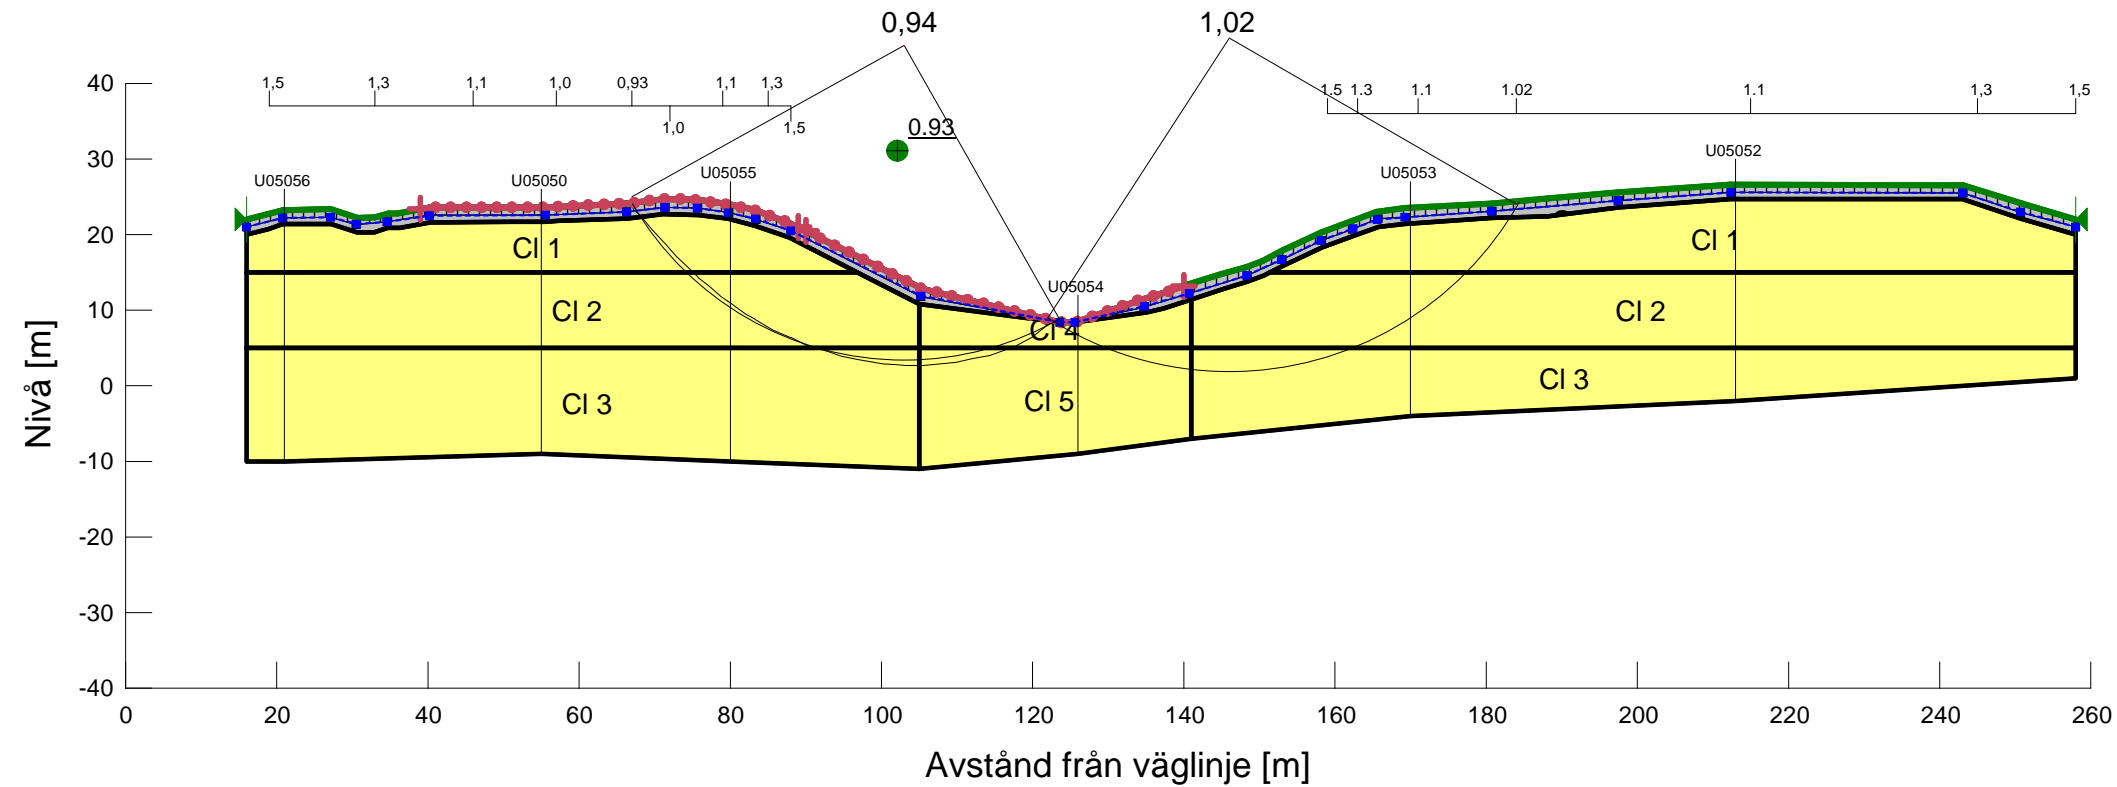

Kombinerad analys V-H

Report generated using GeoStudio 2007, version 7.16. Copyright © 1991-2010 GEO-SLOPE International Ltd.

File Information

Created By: [Petter Karlsson](#)
Revision Number: 43
Last Edited By: [Rebecca Bertilsson](#)
Date: 2011-06-01
Time: 10:55:11
File Name: V19140_kombinerad print.gsz
Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V19140\110819\
Last Solved Date: 2011-06-01
Last Solved Time: 10:56:56

Project Settings

Length(L) Units: [meters](#)
Time(t) Units: [Seconds](#)
Force(F) Units: [kN](#)
Pressure(p) Units: [kPa](#)
Strength Units: [kPa](#)
Unit Weight of Water: [9.807 kN/m³](#)
View: [2D](#)

Analysis Settings

Kombinerad analys V-H

Kind: [SLOPE/W](#)
Method: [Morgenstern-Price](#)
Settings
Side Function
Interslice force function option: [Half-Sine](#)
PWP Conditions Source: [Pressure Head Spatial Function](#)
Pressure Head Spatial Fn.: [Nuvärdersanalys](#)
Slip Surface
Direction of movement: [Left to Right](#)
Use Passive Mode: [No](#)
Slip Surface Option: [Entry and Exit](#)
Critical slip surfaces saved: 5
Optimize Critical Slip Surface Location: [Yes](#)
Tension Crack
Tension Crack Option: [Tension Crack Line](#)
Percentage Wet: 0.5
Tension Crack Fluid Unit Weight: [9.807 kN/m³](#)
FOS Distribution
FOS Calculation Option: [Constant](#)

Advanced

Number of Slices: 30
Optimization Tolerance: 0.01
Minimum Slip Surface Depth: 0.1 m
Optimization Maximum Iterations: 2000
Optimization Convergence Tolerance: 1e-007
Starting Optimization Points: 8
Ending Optimization Points: 16
Complete Passes per Insertion: 1
Driving Side Maximum Convex Angle: 5 °
Resisting Side Maximum Convex Angle: 1 °

Materials

CI 1

Model: Combined, $S=f(\text{datum})$
Unit Weight: 16.6 kN/m³
Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 25 m

CI 2

Model: Combined, $S=f(\text{datum})$
Unit Weight: 16.6 kN/m³
Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 1.81 kPa/m
C/Cu Ratio: 0.1
Elevation: 15 m

CI 3

Model: Combined, $S=f(\text{datum})$
Unit Weight: 17 kN/m³
Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 1.81 kPa/m
C/Cu Ratio: 0.1
Elevation: 15 m

CI 4

Model: Combined, $S=f(\text{datum})$
Unit Weight: 16.6 kN/m³


Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 15 m

Crust


Model: Combined, $S=f(\text{depth})$
Unit Weight: 18 kN/m³
Phi: 30 °
C-Top of Layer: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Top of Layer: 30 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1

CI 5

Model: Combined, $S=f(\text{datum})$
Unit Weight: 17 kN/m³
Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 2.1 kPa/m
C/Cu Ratio: 0.1
Elevation: 5 m

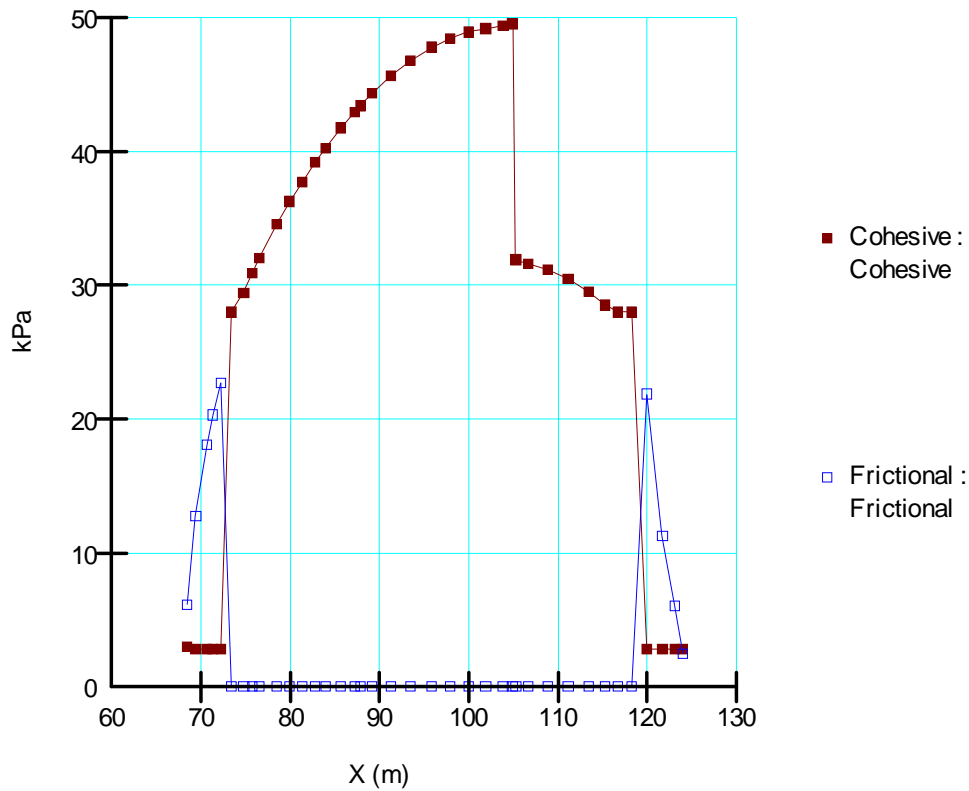

Figur 1. Kohesion och friktion.

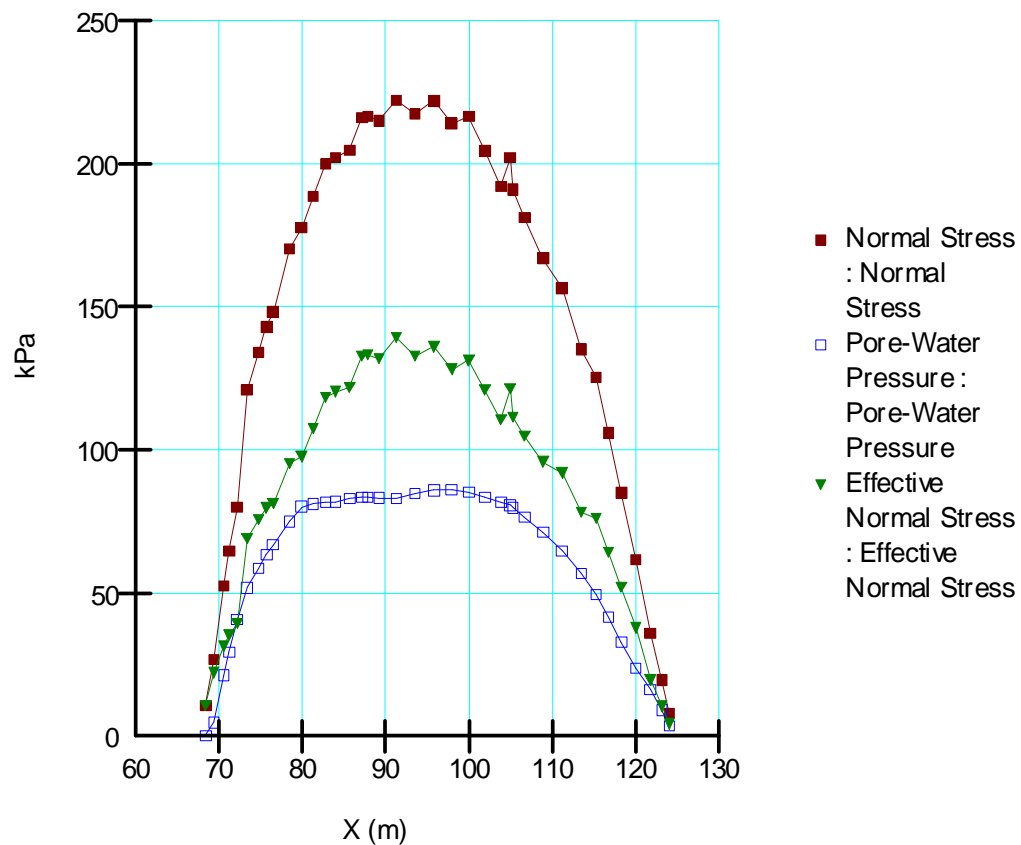

Figur 2. Totalspänning, effektivspänning och portryck.

Kombinerad analys H-V

Report generated using GeoStudio 2007, version 7.16. Copyright © 1991-2010 GEO-SLOPE International Ltd.

File Information

Created By: [Petter Karlsson](#)
Revision Number: 42
Last Edited By: [Rebecca Bertilsson](#)
Date: 2011-06-01
Time: 10:49:36
File Name: V19140_kombinerad print.gsz
Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V19140\110819\
Last Solved Date: 2011-06-01
Last Solved Time: 10:50:36

Project Settings

Length(L) Units: [meters](#)
Time(t) Units: [Seconds](#)
Force(F) Units: [kN](#)
Pressure(p) Units: [kPa](#)
Strength Units: [kPa](#)
Unit Weight of Water: [9.807 kN/m³](#)
View: [2D](#)

Analysis Settings

Kombinerad analys H-V

Kind: [SLOPE/W](#)
Method: [Morgenstern-Price](#)
Settings
 Side Function
 Interslice force function option: [Half-Sine](#)
 PWP Conditions Source: [Pressure Head Spatial Function](#)
 Pressure Head Spatial Fn.: [Nuvärdersanalys](#)
Slip Surface
 Direction of movement: [Right to Left](#)
 Use Passive Mode: [No](#)
 Slip Surface Option: [Entry and Exit](#)
 Critical slip surfaces saved: 5
 Optimize Critical Slip Surface Location: [Yes](#)
Tension Crack
 Tension Crack Option: [Tension Crack Line](#)
 Percentage Wet: 0.5
 Tension Crack Fluid Unit Weight: [9.807 kN/m³](#)
FOS Distribution
 FOS Calculation Option: [Constant](#)

Advanced

Number of Slices: 30
Optimization Tolerance: 0.01
Minimum Slip Surface Depth: 0.1 m
Optimization Maximum Iterations: 2000
Optimization Convergence Tolerance: 1e-007
Starting Optimization Points: 8
Ending Optimization Points: 16
Complete Passes per Insertion: 1
Driving Side Maximum Convex Angle: 5 °
Resisting Side Maximum Convex Angle: 1 °

Materials

CI 1

Model: Combined, $S=f(\text{datum})$
Unit Weight: 16.6 kN/m³
Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 25 m

CI 2

Model: Combined, $S=f(\text{datum})$
Unit Weight: 16.6 kN/m³
Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 1.81 kPa/m
C/Cu Ratio: 0.1
Elevation: 15 m

CI 3

Model: Combined, $S=f(\text{datum})$
Unit Weight: 17 kN/m³
Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 1.81 kPa/m
C/Cu Ratio: 0.1
Elevation: 15 m

CI 4

Model: Combined, $S=f(\text{datum})$
Unit Weight: 16.6 kN/m³


Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 15 m

Crust


Model: Combined, $S=f(\text{depth})$
Unit Weight: 18 kN/m³
Phi: 30 °
C-Top of Layer: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Top of Layer: 30 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1

CI 5

Model: Combined, $S=f(\text{datum})$
Unit Weight: 17 kN/m³
Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 28 kPa
Cu-Rate of Change: 2.1 kPa/m
C/Cu Ratio: 0.1
Elevation: 5 m

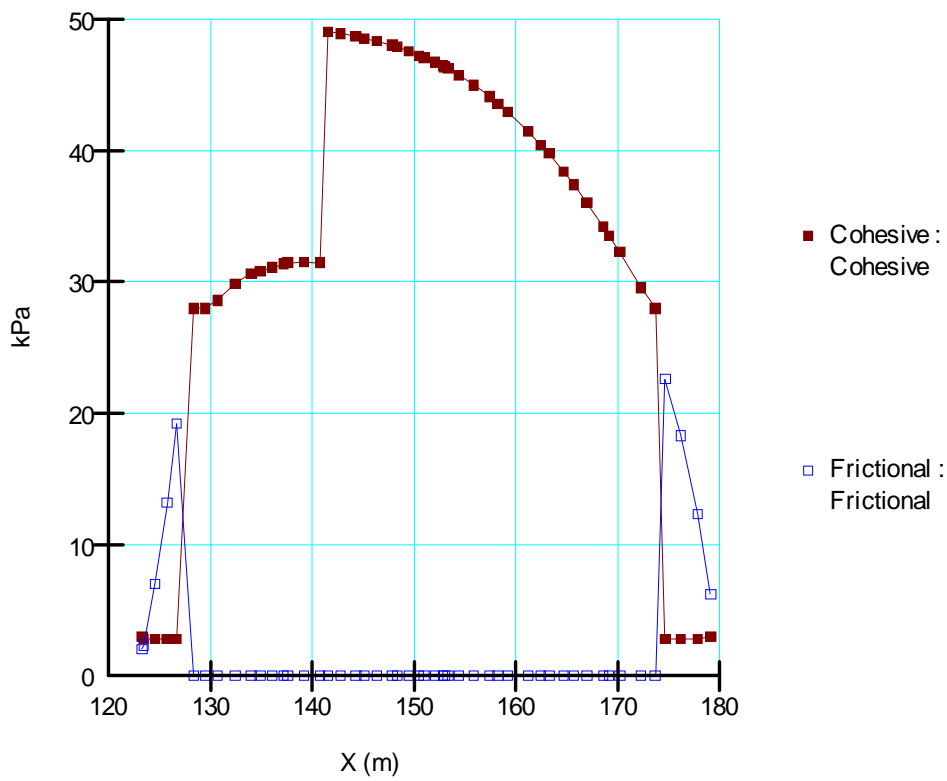

Figur 1. Kohesion och friktion.

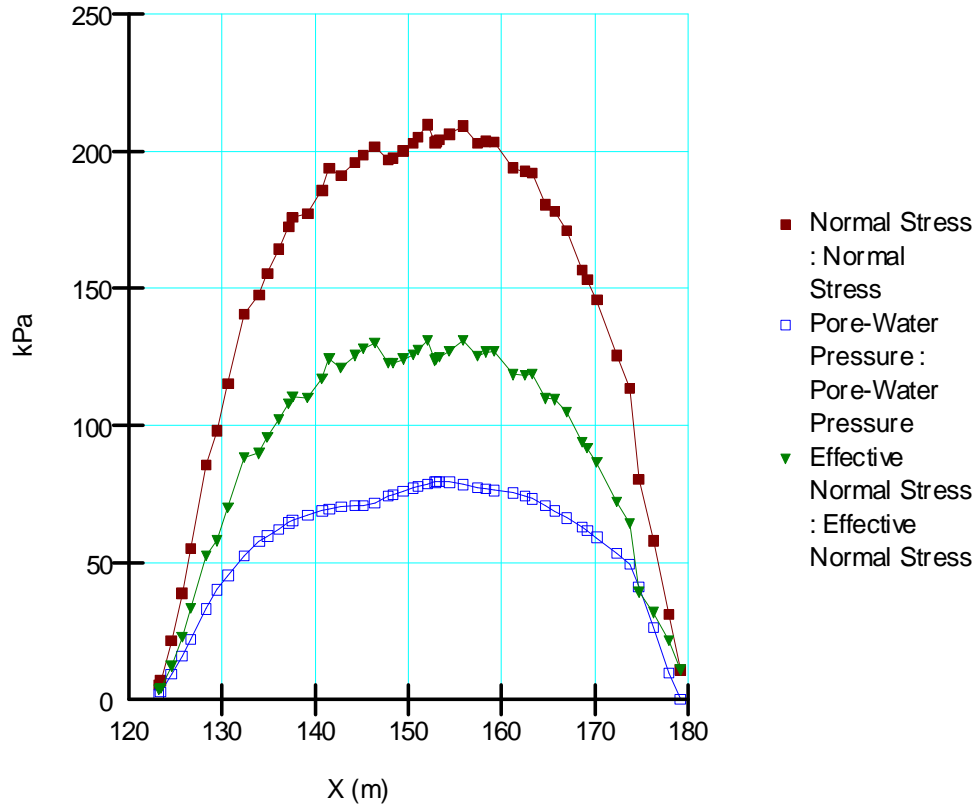


Figur 2. Totalspänning, effektivspänning och portryck.



KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALEN

Sektion: V19140
Delområde: Intagan - Ström
Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit
Method: Morgenstern-Price
PWP Conditions Source: Pressure Head Spatial Function
Date: 2011-06-01
Created By: Petter Karlsson
Last Edited By: Rebecca Bertilsson

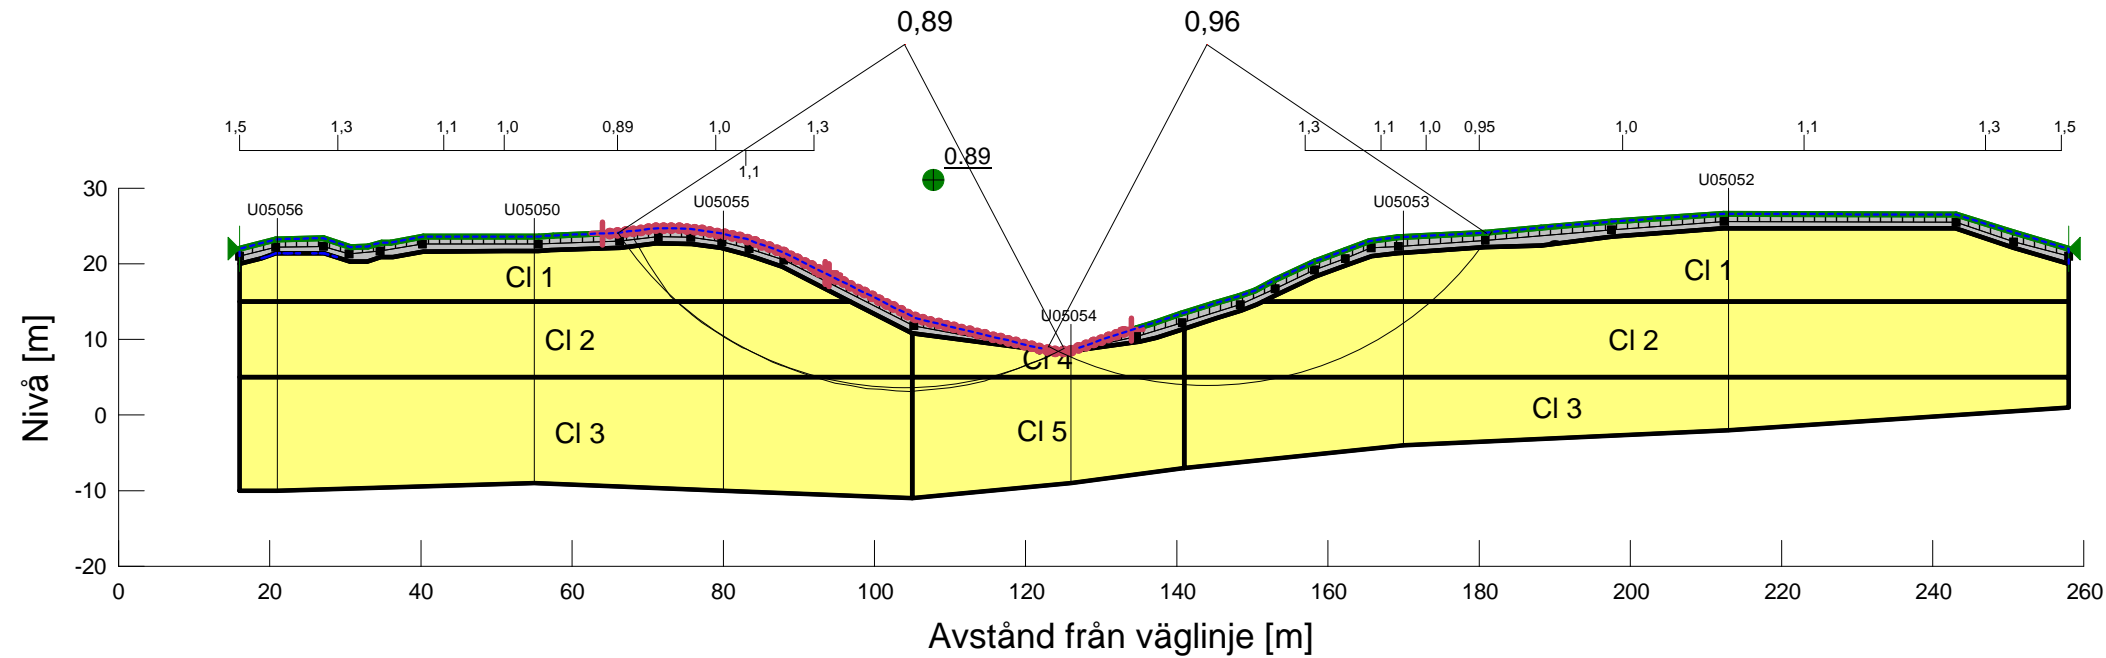

Name: Crust
Model: Combined, S=f(depth)
Unit Weight: 18 kN/m³
Phi: 30 °
Cu-Top of Layer: 30 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1

Name: CI 1
Model: Combined, S=f(datum)
Unit Weight: 16.6 kN/m³
Phi: 30 °
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 25 m

Name: CI 1
Model: Combined, S=f(datum)
Unit Weight: 16.6 kN/m³
Phi: 30 °
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 25 m

Name: CI 4
Model: Combined, S=f(datum)
Unit Weight: 16.6 kN/m³
Phi: 30 °
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 15 m


Name: CI 5
Model: Combined, S=f(datum)
Unit Weight: 17 kN/m³
Phi: 30 °
Cu-Datum: 28 kPa
Cu-Rate of Change: 2.1 kPa/m
C/Cu Ratio: 0.1
Elevation: 5 m



KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALEN

Sektion: V19140
Delområde: Intagan - Ström
Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit
Method: Morgenstern-Price
PWP Conditions Source: Pressure Head Spatial Function
Date: 2011-08-19
Created By: Petter Karlsson
Last Edited By: Kine Meijer

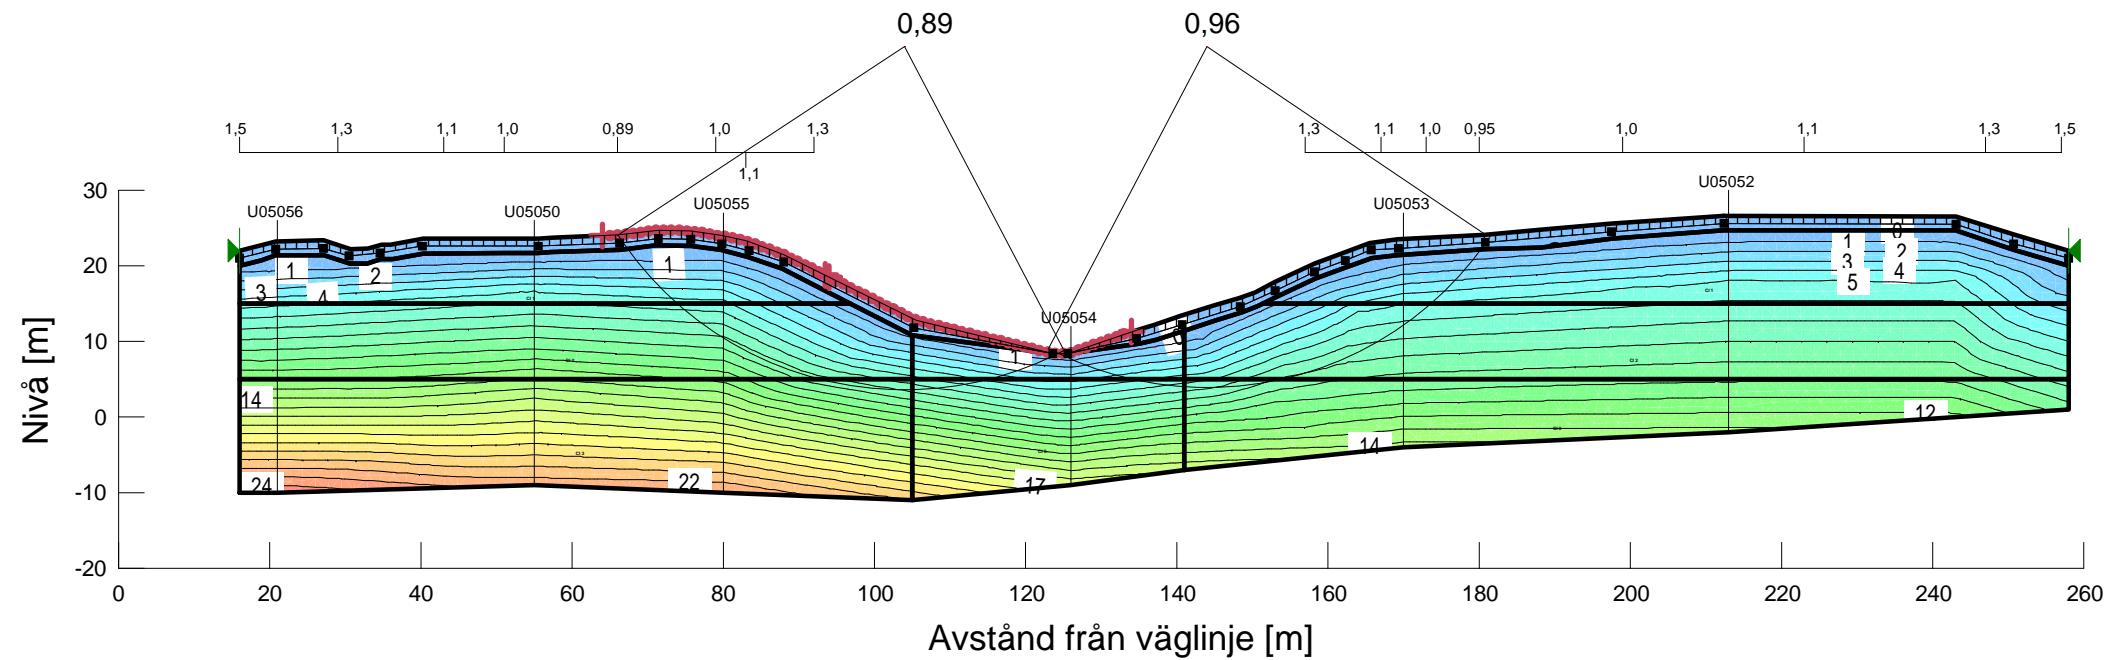

0510001 Bilaga 20 (A3)
Skala 1:1000

Name: Crust
Model: Combined, $S=f(\text{depth})$
Unit Weight: 18 kN/m³
Phi: 30 °
Cu-Top of Layer: 30 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1

Name: CI 1
Model: Combined, $S=f(\text{datum})$
Unit Weight: 16.6 kN/m³
Phi: 30 °
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 25 m

Name: CI 1
Model: Combined, $S=f(\text{datum})$
Unit Weight: 16.6 kN/m³
Phi: 30 °
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 25 m

Name: CI 4
Model: Combined, $S=f(\text{datum})$
Unit Weight: 16.6 kN/m³
Phi: 30 °
Cu-Datum: 28 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Elevation: 15 m

Name: CI 5
Model: Combined, $S=f(\text{datum})$
Unit Weight: 17 kN/m³
Phi: 30 °
Cu-Datum: 28 kPa
Cu-Rate of Change: 2.1 kPa/m
C/Cu Ratio: 0.1
Elevation: 5 m

Directory: P:\Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V19140\110819\
File Name: V19140_kombinerad print.gsz