

Odränerad Analys

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

File Information

Created By: [Petter Karlsson](#)
Revision Number: 24
Last Edited By: [Karlsson, Petter](#)
Date: 2011-02-24
Time: 08:49:26
File Name: V27470_odränerad.gsz
Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Arbetsmaterial\KM\färdiga men ska justeras mht gammal data från Petter\V27470\
Last Solved Date: 2011-02-24
Last Solved Time: 08:50:32

Project Settings

Length(L) Units: [meters](#)
Time(t) Units: [Seconds](#)
Force(F) Units: [kN](#)
Pressure(p) Units: [kPa](#)
Strength Units: [kPa](#)
Unit Weight of Water: [9.807 kN/m³](#)
View: [2D](#)

Analysis Settings

Odränerad Analys

Kind: [SLOPE/W](#)
Method: [Morgenstern-Price](#)
Settings
Apply Phreatic Correction: [No](#)
Side Function
Interslice force function option: [Half-Sine](#)
PWP Conditions Source: [Piezometric Line](#)
Use Staged Rapid Drawdown: [No](#)
Slip Surface
Direction of movement: [Right to Left](#)
Use Passive Mode: [No](#)
Slip Surface Option: [Entry and Exit](#)
Critical slip surfaces saved: 5
Optimize Critical Slip Surface Location: [Yes](#)

Tension Crack

Tension Crack Option: Tension Crack Line

Percentage Wet: 0.5

Tension Crack Fluid Unit Weight: 9.807 kN/m³

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 0.1 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

Materials

CI 1

Model: S=f(datum)

Unit Weight: 16.4 kN/m³

C-Datum: 25 kPa

C-Rate of Change: 0 kPa/m

Limiting C: 0 kPa

Elevation: 17 m

Pore Water Pressure

Piezometric Line: 1

CI 2

Model: S=f(datum)

Unit Weight: 16 kN/m³

C-Datum: 25 kPa

C-Rate of Change: 1.5 kPa/m

Limiting C: 0 kPa

Elevation: 5 m

Pore Water Pressure

Piezometric Line: 1

CI 3

Model: S=f(datum)

Unit Weight: 16.6 kN/m³

C-Datum: 25 kPa

C-Rate of Change: 1.5 kPa/m

Limiting C: 0 kPa

Elevation: 5 m
Pore Water Pressure
Piezometric Line: 1

CI 4


Model: $S=f(\text{depth})$
Unit Weight: 16.4 kN/m³
C-Top of Layer: 3 kPa
C-Rate of Change: 7.5 kPa/m
Limiting C: 0 kPa
Pore Water Pressure
Piezometric Line: 1

Crust


Model: Mohr-Coulomb
Unit Weight: 18 kN/m³
Cohesion: 30 kPa
Phi: 0 °
Phi-B: 0 °
Pore Water Pressure
Piezometric Line: 1

CI 5

Model: $S=f(\text{depth})$
Unit Weight: 16.6 kN/m³
C-Top of Layer: 18 kPa
C-Rate of Change: 1.59 kPa/m
Limiting C: 0 kPa
Pore Water Pressure
Piezometric Line: 1

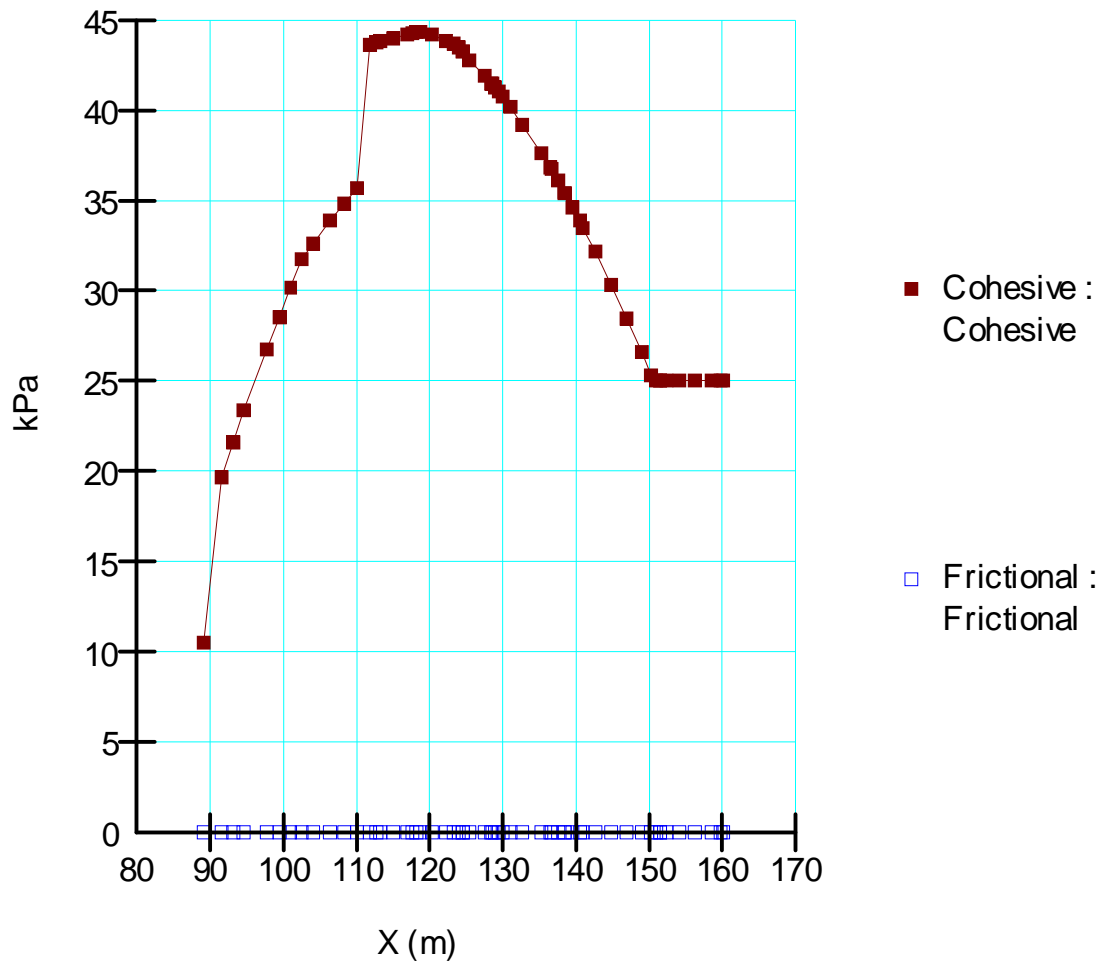

Figur 1. Kohesion och friktion.

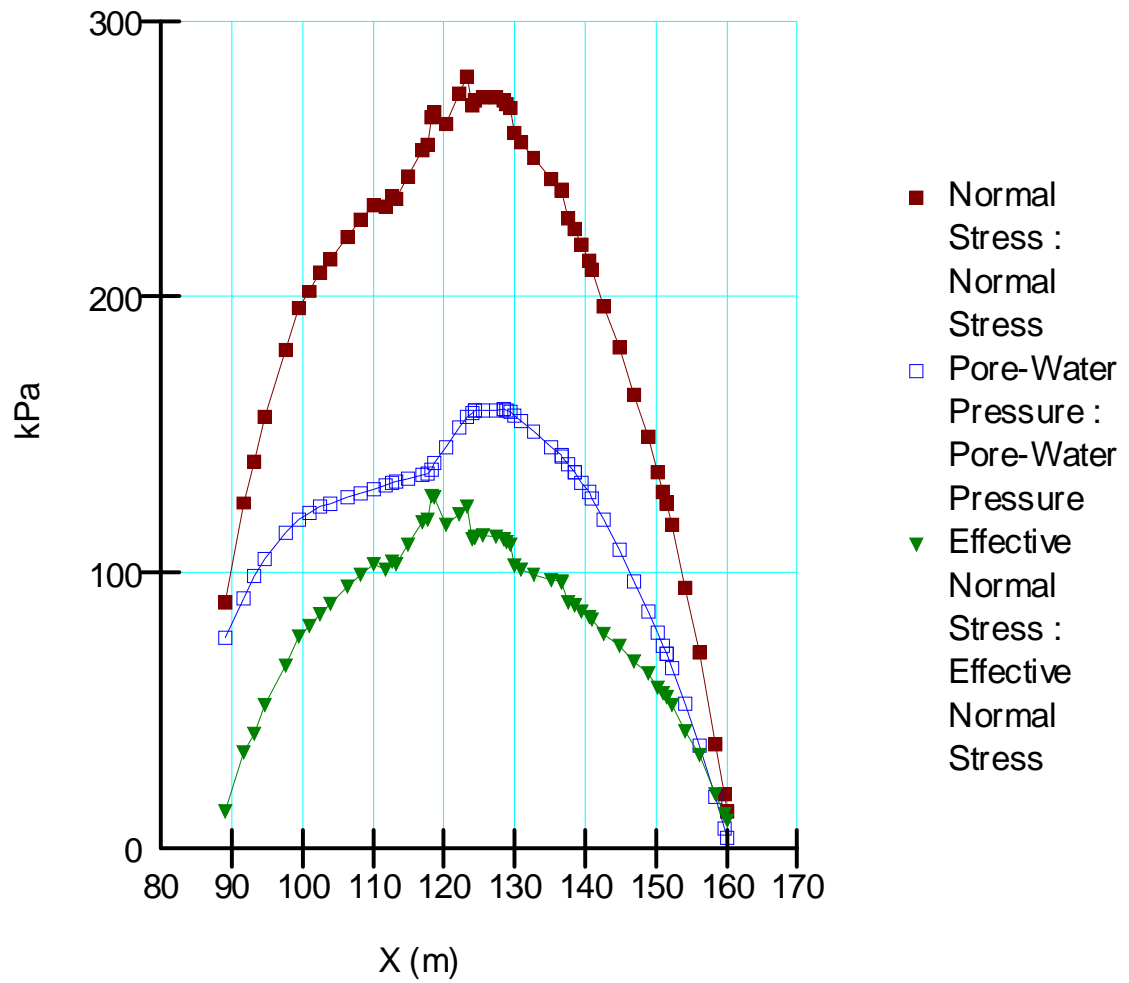

Figur 2. Totalspänning, portryck och effektivspänning.

KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALLEN



Sektion: V27470
 Delområde: Intagan - Ström
 Analysmetod: Odränerad analys


Slip Surface Option: Entry and Exit
 Method: Morgenstern-Price
 PWP Conditions Source: Piezometric Line
 Date: 2011-02-24
 Created By: Petter Karlsson
 Last Edited By: Karlsson, Petter

Skala 1:1000 (A3)

Name: Crust
 Model: Mohr-Coulomb
 Unit Weight: 18 kN/m³
 Cohesion: 30 kPa
 Phi: 0°

Name: CI 1
 Model: S=f(datum)
 Unit Weight: 16.4 kN/m³
 C-Datum: 25 kPa
 C-Rate of Change: 0 kPa/m
 Elevation: 17 m

Name: CI 2
 Model: S=f(datum)
 Unit Weight: 16 kN/m³
 C-Datum: 25 kPa
 C-Rate of Change: 1.5 kPa/m
 Elevation: 5 m

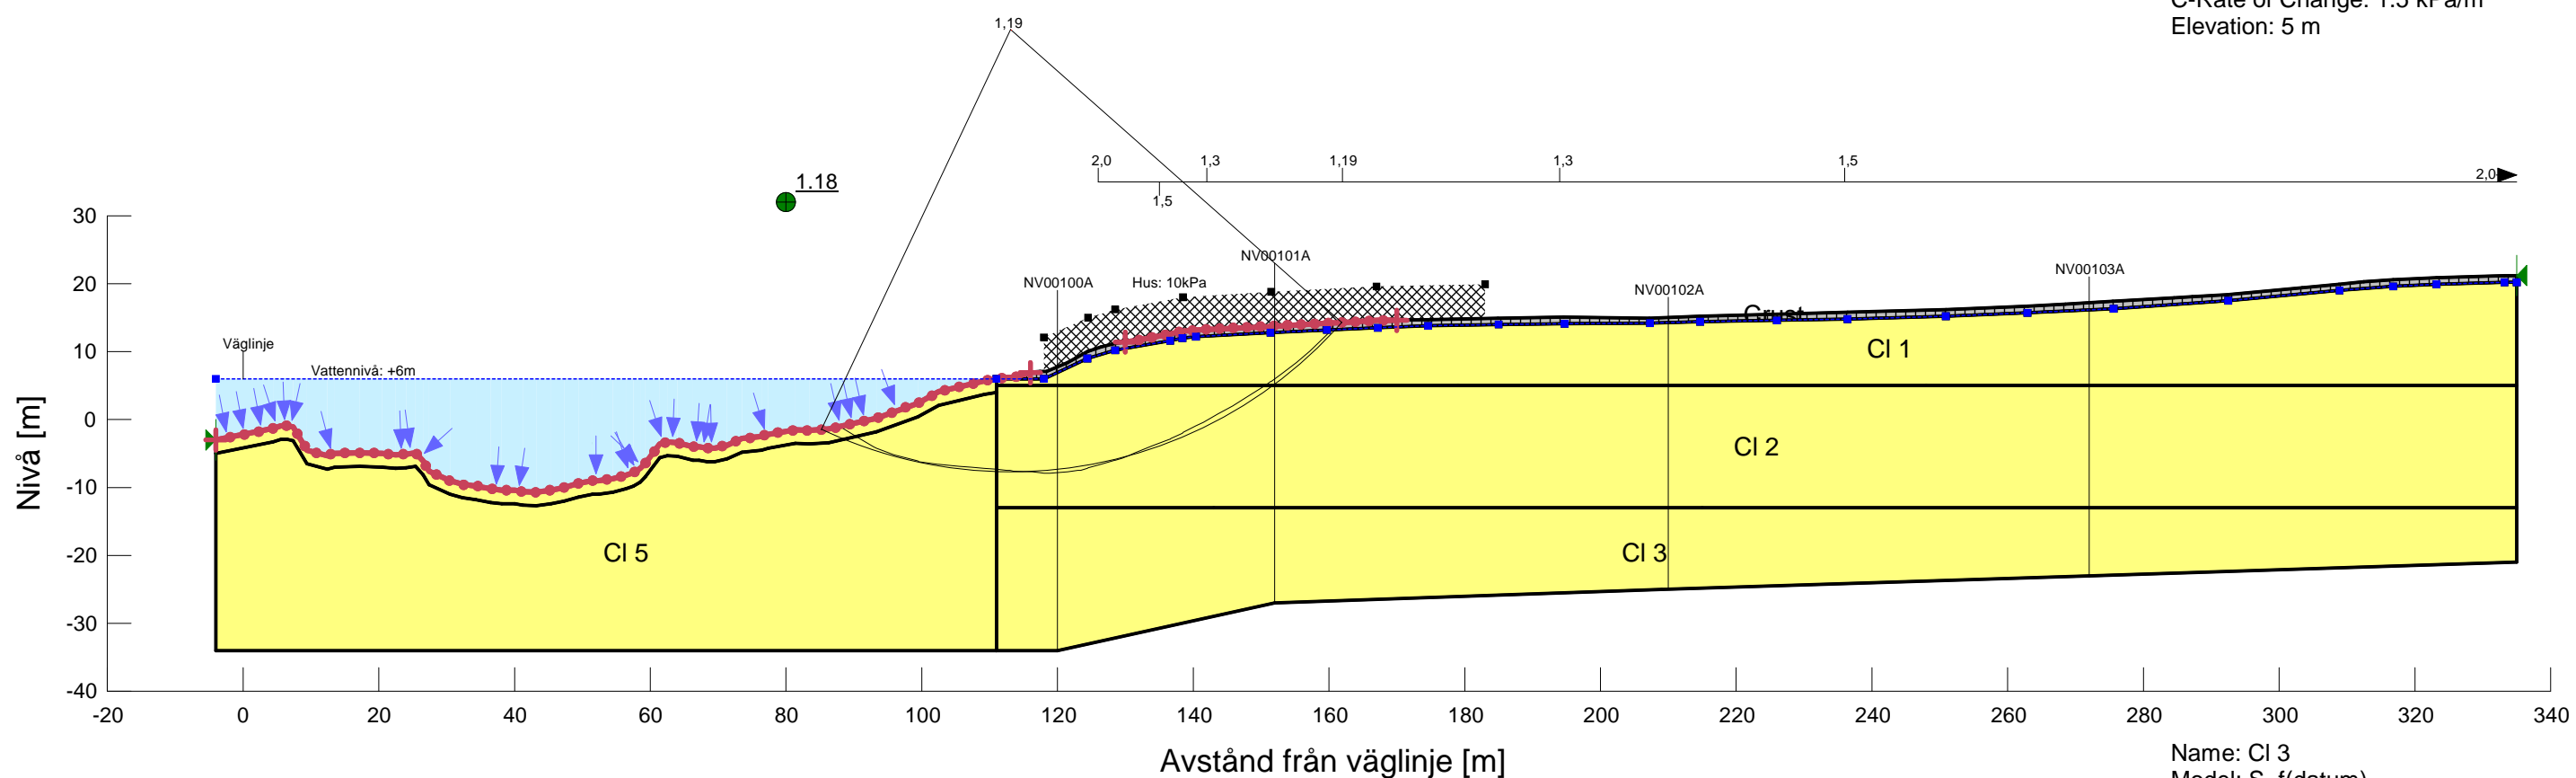

Name: CI 3
 Model: S=f(datum)
 Unit Weight: 16.6 kN/m³
 C-Datum: 25 kPa
 C-Rate of Change: 1.5 kPa/m
 Elevation: 5 m

Name: CI 4
 Model: S=f(depth)
 Unit Weight: 16.4 kN/m³
 C-Top of Layer: 3 kPa
 C-Rate of Change: 7.5 kPa/m

Name: CI 5
 Model: S=f(depth)
 Unit Weight: 16.6 kN/m³
 C-Top of Layer: 18 kPa
 C-Rate of Change: 1.59 kPa/m

Kombinerad Analys

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

File Information

Created By: [Petter Karlsson](#)

Revision Number: [61](#)

Last Edited By: [Kine Meijer](#)

Date: [2011-05-24](#)

Time: [12:53:48](#)

File Name: [V27470_kombinerad.gsz](#)

Directory: [P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V27470\Beräkningar\](#)

Project Settings

Length(L) Units: [meters](#)

Time(t) Units: [Seconds](#)

Force(F) Units: [kN](#)

Pressure(p) Units: [kPa](#)

Strength Units: [kPa](#)

Unit Weight of Water: [9.807 kN/m³](#)

View: [2D](#)

Analysis Settings

Kombinerad Analys

Kind: [SLOPE/W](#)

Method: [Morgenstern-Price](#)

Settings

Side Function

Interslice force function option: [Half-Sine](#)

PWP Conditions Source: [Pressure Head Spatial Function](#)

Pressure Head Spatial Fn.: [Nuvärdesanalys](#)

Slip Surface

Direction of movement: [Right to Left](#)

Use Passive Mode: [No](#)

Slip Surface Option: [Entry and Exit](#)

Critical slip surfaces saved: [5](#)

Optimize Critical Slip Surface Location: [Yes](#)

Tension Crack

Tension Crack Option: [Tension Crack Line](#)

Percentage Wet: [0.5](#)

Tension Crack Fluid Unit Weight: [9.807 kN/m³](#)

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 1.1 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

Materials

CI 1

Model: Combined, $S=f(\text{datum})$ Unit Weight: 16.4 kN/m³

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 25 kPa

Cu-Rate of Change: 0 kPa/m

C/Cu Ratio: 0.1

Elevation: 17 m

CI 2

Model: Combined, $S=f(\text{datum})$ Unit Weight: 16 kN/m³

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 25 kPa

Cu-Rate of Change: 1.5 kPa/m

C/Cu Ratio: 0.1

Elevation: 5 m

CI 3

Model: Combined, $S=f(\text{datum})$ Unit Weight: 16.6 kN/m³

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 25 kPa

Cu-Rate of Change: 1.5 kPa/m

C/Cu Ratio: 0.1

Elevation: 5 m

CI 4

Model: Combined, $S=f(\text{depth})$

Unit Weight: 16.4 kN/m³

Phi: 30 °

C-Top of Layer: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Top of Layer: 3 kPa

Cu-Rate of Change: 7.5 kPa/m

C/Cu Ratio: 0.1

Crust

Model: Combined, $S=f(\text{depth})$

Unit Weight: 18 kN/m³

Phi: 30 °

C-Top of Layer: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Top of Layer: 30 kPa

Cu-Rate of Change: 0 kPa/m

C/Cu Ratio: 0.1

CI 5

Model: Combined, $S=f(\text{depth})$

Unit Weight: 16.6 kN/m³

Phi: 30 °


C-Top of Layer: 0 kPa

C-Rate of Change: 0 kPa/m


Cu-Top of Layer: 18 kPa

Cu-Rate of Change: 1.59 kPa/m

C/Cu Ratio: 0.1

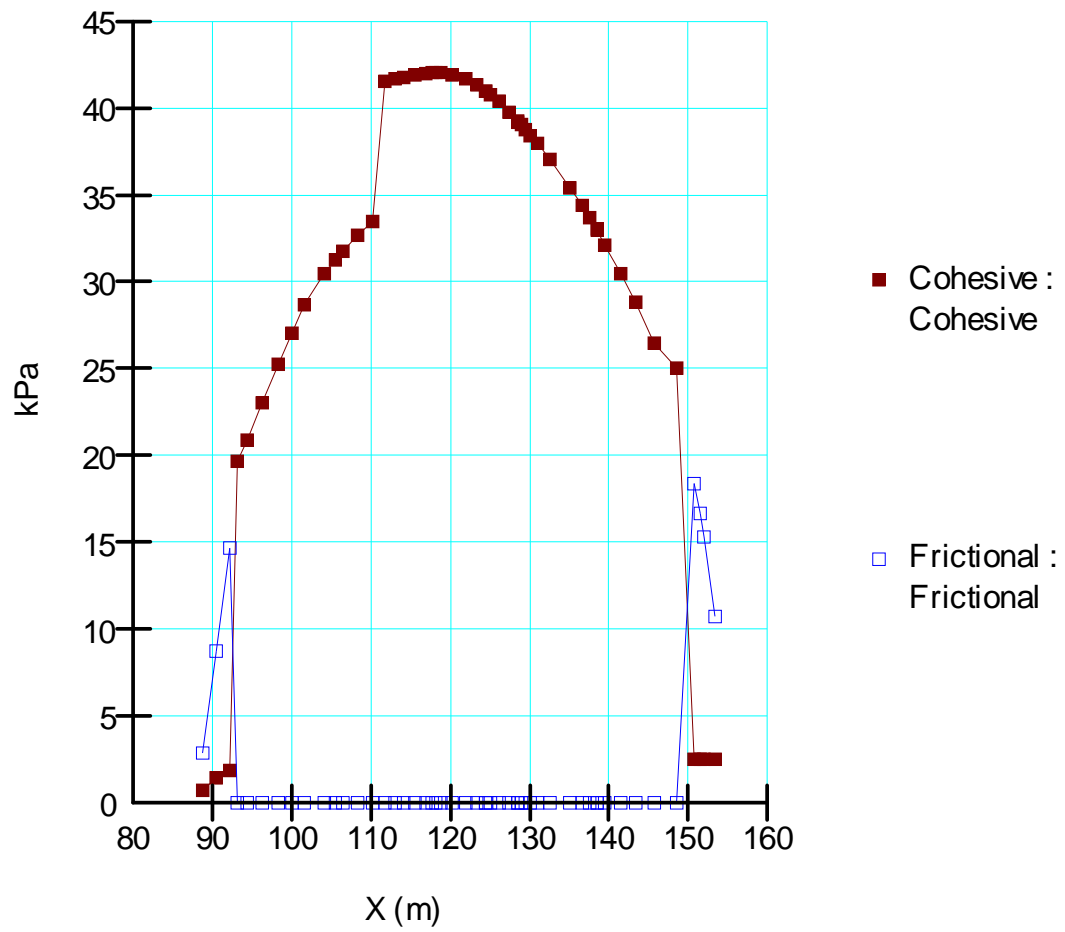

Figur 1. Kohesion och friktion.

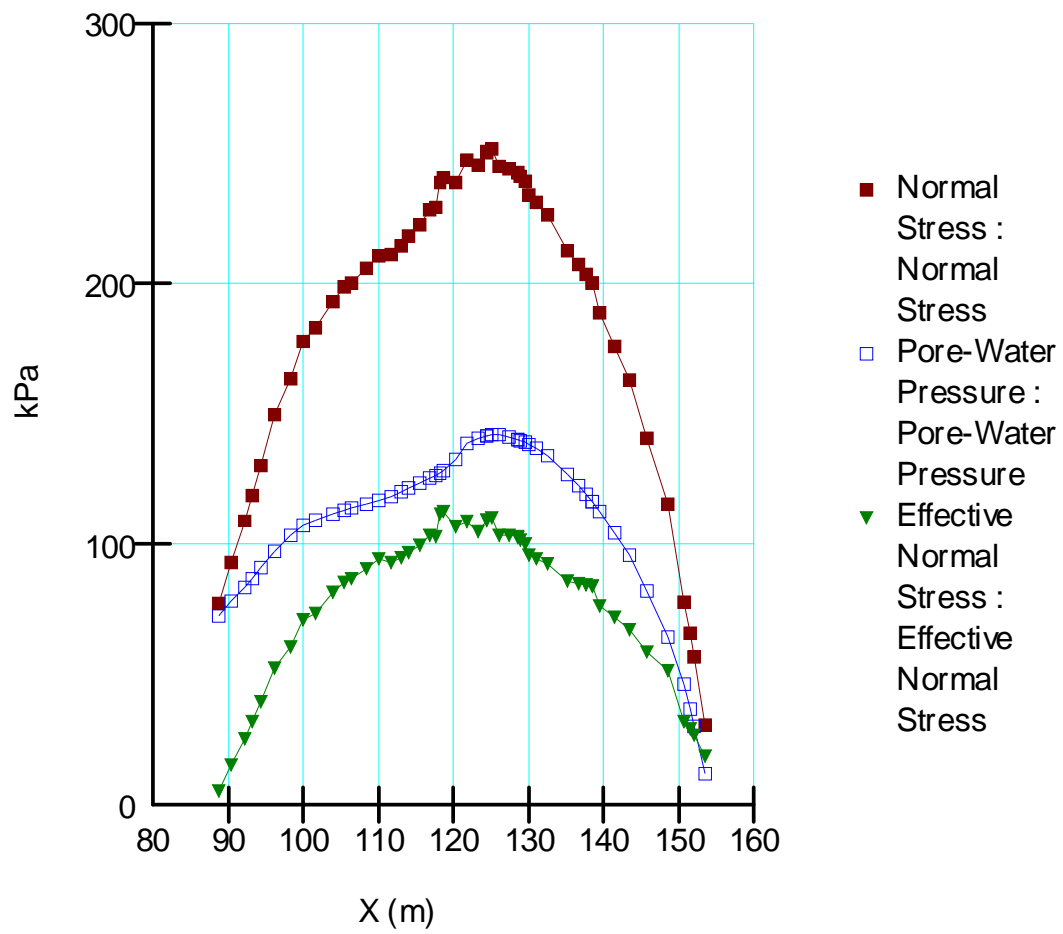

Figur 2. Totalspänning, portryck och effektivspänning.

KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALLEN



Sektion: V27470
 Delområde: Intagan - Ström
 Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit
 Method: Morgenstern-Price
 PWP Conditions Source: Pressure Head Spatial Function
 Date: 2011-02-24
 Created By: Petter Karlsson
 Last Edited By: Karlsson, Petter

Skala 1:1000 (A3)

Name: Crust
 Model: Combined, S=f(depth)
 Unit Weight: 18 kN/m³
 Phi: 30 °
 Cu-Top of Layer: 30 kPa
 Cu-Rate of Change: 0 kPa/m
 C/Cu Ratio: 0.1


Name: CI 1
 Model: Combined, S=f(datum)
 Unit Weight: 16.4 kN/m³
 Phi: 30 °
 Cu-Datum: 25 kPa
 Cu-Rate of Change: 0 kPa/m
 C/Cu Ratio: 0.1
 Elevation: 17 m

Name: CI 2
 Model: Combined, S=f(datum)
 Unit Weight: 16 kN/m³
 Phi: 30 °
 Cu-Datum: 25 kPa
 Cu-Rate of Change: 1.5 kPa/m
 C/Cu Ratio: 0.1
 Elevation: 5 m

Name: CI 3
 Model: Combined, S=f(datum)
 Unit Weight: 16.6 kN/m³
 Phi: 30 °
 Cu-Datum: 25 kPa
 Cu-Rate of Change: 1.5 kPa/m
 C/Cu Ratio: 0.1
 Elevation: 5 m

Name: CI 4
 Model: Combined, S=f(depth)
 Unit Weight: 16.4 kN/m³
 Phi: 30 °
 Cu-Top of Layer: 3 kPa
 Cu-Rate of Change: 7.5 kPa/m
 C/Cu Ratio: 0.1

Name: CI 5
 Model: Combined, S=f(depth)
 Unit Weight: 16.6 kN/m³
 Phi: 30 °
 Cu-Top of Layer: 18 kPa
 Cu-Rate of Change: 1.59 kPa/m
 C/Cu Ratio: 0.1

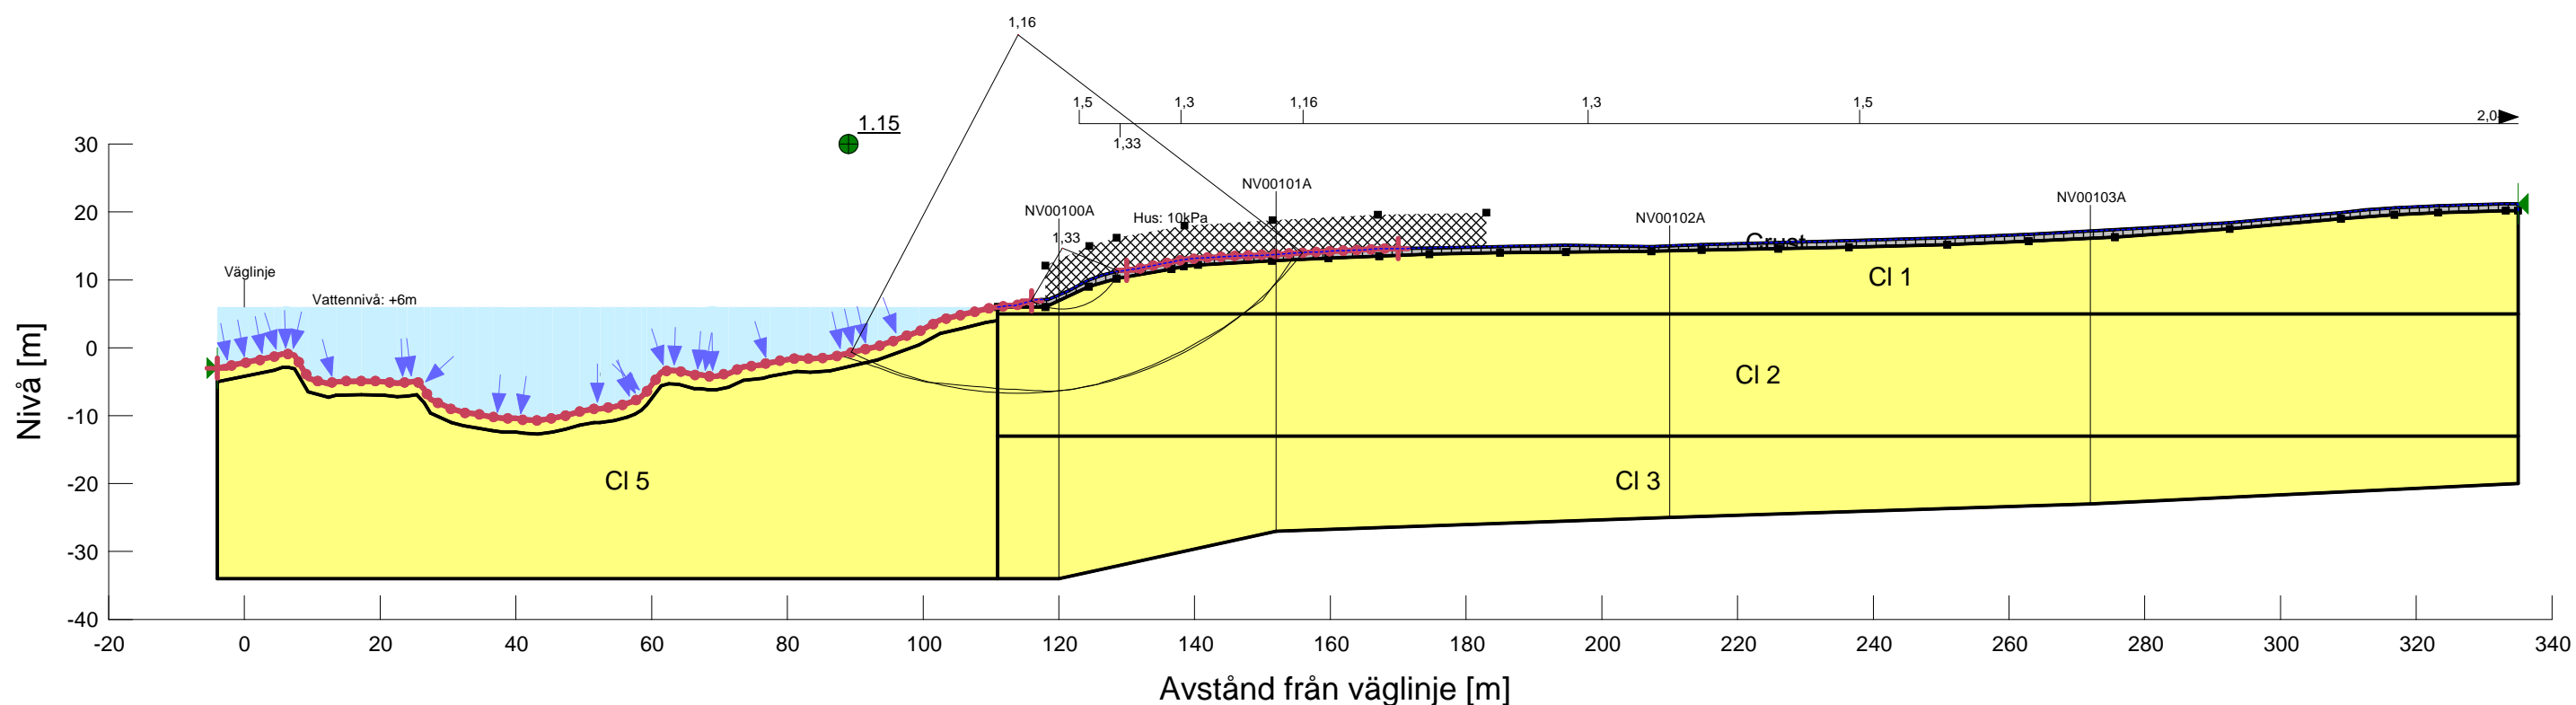

KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALLEN



Sektion: V27470
 Delområde: Intagan - Ström
 Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit
 Method: Morgenstern-Price
 PWP Conditions Source: Pressure Head Spatial Function
 Date: 2011-05-24
 Created By: Petter Karlsson
 Last Edited By: Kine Meijer

Skala 1:1000 (A3)

Name: Crust Model: Combined, S=f(depth) Unit Weight: 18 kN/m ³ Phi: 30 ° Cu-Top of Layer: 30 kPa Cu-Rate of Change: 0 kPa/m C/Cu Ratio: 0.1	Name: CI 3 Model: Combined, S=f(datum) Unit Weight: 16.6 kN/m ³ Phi: 30 ° Cu-Datum: 25 kPa Cu-Rate of Change: 1.5 kPa/m C/Cu Ratio: 0.1 Elevation: 5 m
Name: CI 1 Model: Combined, S=f(datum) Unit Weight: 16.4 kN/m ³ Phi: 30 ° Cu-Datum: 25 kPa Cu-Rate of Change: 0 kPa/m C/Cu Ratio: 0.1 Elevation: 17 m	Name: CI 4 Model: Combined, S=f(depth) Unit Weight: 16.4 kN/m ³ Phi: 30 ° Cu-Top of Layer: 3 kPa Cu-Rate of Change: 7.5 kPa/m C/Cu Ratio: 0.1
Name: CI 2 Model: Combined, S=f(datum) Unit Weight: 16 kN/m ³ Phi: 30 ° Cu-Datum: 25 kPa Cu-Rate of Change: 1.5 kPa/m C/Cu Ratio: 0.1 Elevation: 5 m	Name: CI 5 Model: Combined, S=f(depth) Unit Weight: 16.6 kN/m ³ Phi: 30 ° Cu-Top of Layer: 18 kPa Cu-Rate of Change: 1.59 kPa/m C/Cu Ratio: 0.1

